



DIGITAL MULTI METER MULTIMETRO DIGITAL

DIMEX
— TRADING ⚡ CO LTDA —
INTERNATIONAL BUSINESS SOLUTIONS

 @dimextrading

DIMEXTRADINGCO.COM



YT-36S

Smart multimeter

Specifications

Spec	162x40.2x18.5mm
Maximum reading	3 1/2Dgt (6000Counts)
Product weight	71g



Built-in NCV, can test zero fine line

Type-C charging port

- Built-in lighting.
- Equipped with test pen function.
- (Low, middle and third grade suitable for different places)
- Type-C charging, solve the trouble of replacing the battery.
- Digital and analog double screen display, easy to observe.
- AC/DC voltage, resistance, diode, on-off test.
- Capacitance test, ac voltage with frequency display.
- Room temperature display, full range overload protection.
- Low voltage reminder, more humanized.
- Data retention, can retain test data, easy to record.
- Automatic shutdown function (5 minutes), more energy saving.
- Backlight lighting function, the use of a richer environment.



Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
1/30	4.5/4	32x24x34



YT-0827



Built-in LED background light



The overall support, for more occasions to use

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
3/30	9/7	82x23x29



YT-36B

Smart multimeter

Specifications

Spec	162x40.2x18.5mm
Maximum reading	3 1/2Dgt (6000Counts)
Product weight	71g



Built-in NCV, can test zero fine line

Type-C charging port

- Built-in lighting.
- Equipped with test pen function.
- (Low, middle and third grade suitable for different places)
- Type-C charging, solve the trouble of replacing the battery.
- Digital and analog double screen display, easy to observe.
- AC/DC voltage test, resistance test, on-off test.
- AC voltage has its own frequency display.
- Room temperature display, full range overload protection.
- Low voltage reminder, more humanized.
- Data retention, can retain test data, easy to record.
- Automatic shutdown function (5 minutes), more energy saving.
- Backlight lighting function, the use of a richer environment.



Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
1/30	4.5/4	32x24x34

Specifications

CODE	YT-0827B	YT-0827C	YT-0827D
DC voltage	200m/2000m/500V	200m/2000m/500V	200m/2000m/500V
AC voltage	200/500V	200/500V	200/500V
DC current	200u/2000u/ 20m/200m/10A	200u/2000u/ 20m/200m/10A	200u/2000u/ 20m/200m/10A
Resistance	200/2000/20k/2000kΩ	200/2000/20k/2000kΩ	200/2000/20k/2000kΩ
On-off test	✓	✓	✓
Temperature	/	-20-300°C	-20-300°C
Buzzer	✓	✓	✓
Diode test	✓	✓	✓
Audion test	✓	✓	✓
Precise resistance	/	/	✓
Dimensions	140x88x30mm	140x88x30mm	140x88x30mm
weight	188g	188g	188g



Product color can be customized according to customer needs

YT-0828



The screen is freely adjustable



The overall support, for more occasions to use

Packing information

Qty/Ctn(gross)	Weight(kg)	Size (cm)
1/30	18/16	62x24x48.5



Product color can be customized according to customer needs

YT-0829



Triode test



The overall support, for more occasions to use

Packing information

Qty/Ctn(gross)	Weight(kg)	Size (cm)
5/60	15/13	67x23x58

Specifications

CODE	YT-0828B	YT-0828B
DC voltage	200m/2000/20/200/1000V	200m/2000/20/200/1000V
AC voltage	200mV/2V/20V/200V/750V	200mV/2V/20V/200V/750V
DC current	2m/20m/200m/2A	2m/20m/200m/2A
Resistance	200/2000/20k/200k/2M/200M	200/2000/20k/200k/2M/200M
On-off test	√	√
Temperature	/	-20-700°C
Auto power-off	√	√
Capacitance	20nF/200nF/2uF/20uF/200uF	20nF/200nF/2uF/20uF/200uF
Frequency	/	50Hz
Diode test	3V/0.8mA	/
Audion test	Vce≈3V, 1b≈10uA	Vce≈3V, 1b≈10uA
Dimensions	200×90×40mm	200×90×40mm
weight	426g	426g

Specifications

CODE	YT-0829B	YT-0829B	YT-0829B
DC voltage	200m/2000m/20/200/600V	200m/2000m/20/200/600V	200m/2000m/20/200/600V
AC voltage	200/600V	200/600V	200/600V
DC current	200u/2000u/ 20m(10A)/200m	200u/2000u/ 20m(10A)/200m	200u/2000u/ 20m(10A)/200m
Resistance	200/2000/20k/2000kΩ	200/2000/20k/2000kΩ	200/2000/20k/2000kΩ
On-off test	/	/	√
Temperature	/	0-1000°C	/
Buzzer	/	/	√
Diode test	3V/0.8mA	3V/0.8mA	3V/0.8mA
Audion test	Vce≈3V, 1b≈10uA	Vce≈3V, 1b≈10uA	Vce≈3V, 1b≈10uA
Precise resistance	/	/	√
Dimensions	127×66×26mm	127×66×26mm	127×66×26mm
weight	127g	127g	127g

YT-0830



● Product color can be customized according to customer needs



Chip upgrade, smart chip use more stable



Triode test

Packing information

Qty/Case (pcs)	Weight(kg)	Size (cm)
5/50	12/18	47x23x56

YT-0861



● Product color can be customized according to customer needs

Specifications

DC voltage	1000V
AC voltage	750V
AC current	200A/1000A
Resistance	200/20K
On-off test	✓
Input resistance	10M
Frequency	3/5
Size of the opening	60mm
Maximum reading	3 1/2 LCD, Max reading 1999
Dimensions	230x95x37mm
Power supply battery	4722 1604 004P (9V)
Weight	282g



Measuring large current

Voltage detection

Packing information

Qty/Case (pcs)	Weight(kg)	Size (cm)
1/30	14/12	55x26.5x40

Specifications

CODE	YT-0830B	YT-0830C	YT-0830D
DC voltage	200m/2000m/20/200/1000V	200m/2000m/20/200/1000V	200m/2000m/20/200/1000V
AC voltage	200/750V	200/750V	200/750V
DC current	200u/2000u/ 20m/200m/10A	200u/2000u/ 20m/200m/10A	200u/2000u/ 20m/200m/10A
Resistance	200/2000/20k/2000kΩ	200/2000/20k/2000kΩ	200/2000/20k/2000kΩ
On-off test	/	/	✓
Temperature	/	✓	/
Buzzer	/	/	✓
Overload protection	✓	✓	✓
Diode test	✓	✓	✓
Audion test	✓	✓	✓
Precise resistance	✓	✓	✓
Dimensions	128x70x28mm	128x70x28mm	128x70x28mm
weight	86g	86g	86g

YT-0863



● Product color can be customized according to customer needs

Specifications

DC voltage	600V
AC voltage	450V
AC current	20A/200A/600A
Resistance	200K
On-off test	✓
Input resistance	1M
Frequency	3/5
Size of the opening	30mm
Maximum reading	3 1/2 LCD, Max reading 1999
Dimensions	155x65x25mm
Power supply battery	1.5V AAA × 2
Weight	126g



Measuring large current

Voltage detection

Packing information

Qty/Case (pcs)	Weight(kg)	Size (cm)
1/30	14/12	55x26.5x40

Product pictures



CODE	YT-632	YT-633	YT-634
LCD Display	3 1/2Digit (2000Counts) LCD display	3 1/2Digit (2000Counts) LCD display	3 3/4Digit (4000Counts) LCD display
DC Voltage	200mV/2V/20V/200V/600V	200mV/2V/20V/200V/600V	400mV/4V/40V/400V/600V
AC Voltage	2V/20V/200V/600V	2V/20V/200V/600V	4V/40V/400V/600V
DC current	/	200A/1000A	/
AC current	20A/200A/1000A	200A/1000A	40A/400A/1000A
Resistance	200 Ω /2k/20k/200k Ω /2M Ω /20M Ω	200 Ω /2k/20k/200k Ω /2M Ω /20M Ω	400 Ω /4k/40k/400k Ω /4M Ω /40M Ω
Continuity Test	✓	✓	✓
Electric Capacity	/	/	/
Frequency (Hz)	/	/	9.999/99.99/9.999K/99.99K/999.9K/5MHz
Duty Cycle	/	/	/
NCV	✓	✓	✓
Backlight Function	✓	✓	✓
Flashlight	✓	✓	✓
Data-Hold	✓	✓	✓
Maximum/Minimum	✓	/	✓
Relative Measurement(Dc zero)	/	✓	/
Ce Grade	CAT III 600V	CAT III 600V	CAT III 600V
Power Supply	1.5V AAA × 2	1.5V AAA × 2	1.5V AAA × 2
Dimensions	243×88×43mm	243×88×43mm	243×88×43mm
Weight	325g	361g	325g
Size of the opening	45mm	45mm	45mm

- With flashlight lighting, easy to work in dim place.
- Built-in chip automatically shuts down in 15 minutes.
- Built-in NCV test function, more convenient detection.
- Low battery power reminder, more convenient and intuitive.
- 45mm big tongs, wider measuring range.
- Large screen backlight, more clear data display.

Product pictures



CODE	YT-635	YT-636	YT-637
LCD Display	3 3/4Digit (4000Counts) LCD display	3 5/6Digit (6000Counts) LCD display	3 5/6Digit (6000Counts) LCD display
DC Voltage	400mV/4V/40V/400V/600V	600mV/6V/60V/600V	600mV/6V/60V/600V
AC Voltage	4V/40V/400V/600V	6V/60V/600V	6V/60V/600V
DC current	400A/1000A	/	600A/1000A
AC current	400A/1000A	60A/600A/1000A	600A/1000A
Resistance	400 Ω /4k/40k/400k Ω /4M Ω /40M Ω	600 Ω /6k/60k/600k Ω /6M Ω /60M Ω	600 Ω /6k/60k/600k Ω /6M Ω /60M Ω
Continuity Test	✓	✓	✓
Electric Capacity	/	99.99nF/999.9nF/9.999uF/99.99uF/999.9uF	99.99nF/999.9nF/9.999uF/99.99uF/999.9uF
Frequency (Hz)	9.999/99.99/9.999K/99.99K/999.9K/5MHz	9.999/99.99/9.999K/99.99K/999.9K/5MHz	9.999/99.99/9.999K/99.99K/999.9K/5MHz
Duty Cycle	/	10%~90%	10%~90%
NCV	✓	✓	✓
Backlight Function	✓	✓	✓
Flashlight	✓	✓	✓
Data-Hold	✓	✓	✓
Maximum/Minimum	/	✓	/
Relative Measurement(Dc zero)	✓	/	✓
Ce Grade	CAT III 600V	CAT III 600V	CAT III 600V
Power Supply	1.5V AAA × 2	1.5V AAA × 2	1.5V AAA × 2
Dimensions	243×88×43mm	243×88×43mm	243×88×43mm
Weight	361g	325g	361g
Size of the opening	45mm	45mm	45mm


- With flashlight lighting, easy to work in dim place.
- Built-in chip automatically shuts down in 15 minutes.
- Built-in NCV test function, more convenient detection.
- Low battery power reminder, more convenient and intuitive.
- 45mm big tongs, wider measuring range.
- Large screen backlight, more clear data display.

Product pictures



CODE	YT-532	YT-535	YT-536	YT-537
LCD Display	3 1/2 Digit(2000Counts)	3 3/4 Digit(4000Counts)	3 5/6 Digit(6000Counts)	3 5/6 Digit(6000Counts)
DC Voltage	200mV/2V/20V/200V/600V	400mV/4V/40V/400V/600V	600mV/6V/60V/600V/1000V	600mV/6V/60V/600V/1000V
AC Voltage	2V/20V/200V/600V	4V/40V/400V/600V	6V/60V/600V/750V	6V/60V/600V/750V
DC current	200uA/2000uA/ 20mA/200mA/2A/10A	400uA/4000uA/ 40mA/400mA/10A	600uA/6000uA/ 60mA/600mA/6A/10A	600uA/6000uA/ 60mA/600mA/6A/10A
AC current	200uA/2000uA/ 20mA/200mA/2A/10A	400uA/4000uA/ 40mA/400mA/10A	600uA/6000uA/ 60mA/600mA/6A/10A	600uA/6000uA/ 60mA/600mA/6A/10A
Resistance	200 Ω /2k/20k/200k Ω / 2M Ω /20M Ω	400 Ω /4k/40k/400k Ω / 4M Ω /40M Ω	600 Ω /6k/60k/600k Ω / 6M Ω /60M Ω	600 Ω /6k/60k/600k Ω / 6M Ω /60M Ω
Continuity Test	✓	✓	✓	✓
Temperature	/	-20~750℃	/	-20~750℃
Electric Capacity	/	10nF~100uF	10nF~100uF	10nF~100uF
Frequency (Hz)	/	9.999/99.99/9.999K/99.99K/ 999.9K/5MHz	9.999/99.99/9.999K/99.99K/ 999.9K/5MHz	9.999/99.99/9.999K/99.99K/ 999.9K/5MHz
Duty Cycle	/	/	/	10%~90%
NCV	✓	✓	/	✓
Backlight Function	✓	✓	✓	✓
Flashlight	✓	✓	✓	✓
Data-Hold	✓	✓	✓	✓
Maximum/Minimum	✓	/	✓	✓
Relative Measurement	✓	✓	✓	✓
Ce Grade	CAT III 600V	CAT III 600V	CAT III 600V	CAT III 600V
Power Supply	1.5V AAA × 2	1.5V AAA × 2	1.5V AAA × 2	1.5V AAA × 2
Dimensions	195×94×54mm	195×94×54mm	195×94×54mm	195×94×54mm
Weight	335g	335g	335g	335g

Compared with ordinary soft seal chip



- Large screen LED, white backlight more clear.
- Built-in chip automatically shuts down in 15 minutes.
- Built-in NCV test function, more convenient detection.
- Over molding injection, comfortable hand feel
- Intelligent package chip.
- Turntable fonts never wear out.


Qty/Chn(pcs)	Weight(kg)	Size (cm)
1/36	11/13	42×31×32

Product pictures



CODE	YT-732	YT-734	YT-735
LCD Display	3 1/2 Digit(2000Counts)	3 3/4 Digit(4000Counts)	3 3/4 Digit(4000Counts)
DC Voltage	200mV/2V/20V/200V/600V	400mV/4V/40V/400V/600V	400mV/4V/40V/400V/600V
AC Voltage	2V/20V/200V/600V	4V/40V/400V/600V	4V/40V/400V/600V
DC current	200uA/2000uA/ 20mA/200mA/2A/10A	400uA/4000uA/ 40mA/400mA/10A	400uA/4000uA/ 40mA/400mA/10A
AC current	200uA/2000uA/ 20mA/200mA/2A/10A	400uA/4000uA/ 40mA/400mA/10A	400uA/4000uA/ 40mA/400mA/10A
Resistance	200 Ω /2k/20k/200k Ω / 2M Ω /20M Ω	400 Ω /4k/40k/400k Ω / 4M Ω /40M Ω	400 Ω /4k/40k/400k Ω / 4M Ω /40M Ω
Continuity Test	✓	✓	✓
Temperature	/	-20~750℃	-20~750℃
Electric Capacity	/	10nF~100uF	/
Frequency (Hz)	/	9.999/99.99/9.999K/99.99K/ 999.9K/5MHz	/
Duty Cycle	/	/	/
NCV	✓	✓	✓
Backlight Function	✓	✓	✓
Flashlight	/	/	/
Data-Hold	✓	✓	✓
Maximum/Minimum	✓	✓	✓
Relative Measurement	✓	✓	✓
Ce Grade	CAT III 600V	CAT III 600V	CAT III 600V
Power Supply	1.5V AAA × 2	1.5V AAA × 2	1.5V AAA × 2
Dimensions	148×74×44mm	148×74×44mm	148×74×44mm
Weight	192g	192g	192g

Compared with ordinary soft seal chip

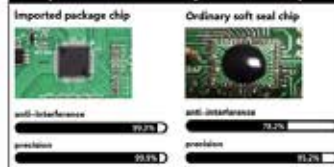

- White backlight more clear.
- Built-in chip automatically shuts down in 15 minutes.
- Built-in NCV test function, more convenient detection.
- Over molding injection, comfortable hand feel
- Intelligent package chip.
- Turntable fonts never wear out.

Qty/Chn(pcs)	Weight(kg)	Size (cm)
1/36	11/9	33×26×32

Product pictures			
	YT-952	YT-953	YT-955
CODE	YT-952	YT-953	YT-955
LCD Display	3 1/2 Digit(2000Counts)	3 1/2 Digit(2000Counts)	3 3/4 Digit(4000Counts)
DC Voltage	200mV/2V/20V/200V/600V	200mV/2V/20V/200V/600V	400mV/4V/40V/400V/600V
AC Voltage	2V/20V/200V/600V	2V/20V/200V/600V	4V/40V/400V/600V
DC current	/	/	/
AC current	/	/	/
Resistance	200 Ω/2k/20k/200k Ω/2M Ω/20M Ω	200 Ω/2k/20k/200k Ω/2M Ω/20M Ω	400 Ω/4k/40k/400k Ω/4M Ω/40M Ω
Continuity Test	✓	✓	✓
Temperature	/	/	/
Electric Capacity	/	/	/
Frequency (Hz)	9.999/99.99/9.999K/99.99K/ 999.9K/5MHz	9.999/99.99/9.999K/99.99K/ 999.9K/5MHz	9.999/99.99/9.999K/99.99K/ 999.9K/5MHz
Duty Cycle	/	/	/
NCV	✓	✓	✓
Backlight Function	/	✓	✓
Flashlight	✓	✓	✓
Data-Hold	✓	✓	✓
Maximum/Minimum	✓	✓	/
Relative Measurement	✓	✓	✓
Ce Grade	CAT III 600V	CAT III 600V	CAT III 600V
Power Supply	1.5V AAA × 2	1.5V AAA × 2	1.5V AAA × 2
Dimensions	133×65×32mm	133×65×32mm	133×65×32mm
Weight	142g	142g	142g

Compared with ordinary soft seal chip

Imported package chip	Ordinary soft seal chip
	
anti-interference	anti-interference
precision	precision

- With flashlight lighting, easy to work in dim place.
- Built-in chip automatically shuts down in 15 minutes.
- Built-in NCV test function, more convenient detection.
- Large screen LED, white backlight more clear.
- Intelligent package chip.

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
1/60	15/13	42×31×32

Product pictures		
	YT-953A	YT-734
CODE	YT-953A	YT-734
LCD Display	3 1/2 Digit(2000Counts)	3 3/4 Digit(4000Counts)
DC Voltage	200mV/2V/20V/200V/600V	400mV/4V/40V/400V/600V
AC Voltage	2V/20V/200V/600V	4V/40V/400V/600V
DC current	200uA/2000uA/20mA/200mA/2A/10A	400uA/4000uA/40mA/400mA/10A
AC current	200uA/2000uA/20mA/200mA/2A/10A	400uA/4000uA/40mA/400mA/10A
Resistance	200 Ω/2k/20k/200k Ω/2M Ω/20M Ω	400 Ω/4k/40k/400k Ω/4M Ω/40M Ω
Continuity Test	✓	✓
Temperature	/	-20~750℃
Electric Capacity	/	99.99nF/999.9nF/9.999uF/99.99uF
Frequency (Hz)	/	/
Duty Cycle	/	/
NCV	✓	✓
Backlight Function	✓	✓
Flashlight	✓	✓
Data-Hold	✓	✓
Maximum/Minimum	✓	✓
Relative Measurement	✓	✓
Ce Grade	CAT III 600V	CAT III 600V
Power Supply	1.5V AAA × 2	1.5V AAA × 2
Dimensions	148×74×44mm	148×74×44mm
Weight	192g	192g

Compared with ordinary soft seal chip

Imported package chip	Ordinary soft seal chip
	
anti-interference	anti-interference
precision	precision

- With flashlight lighting, easy to work in dim place.
- Built-in chip automatically shuts down in 15 minutes.
- Built-in NCV test function, more convenient detection.
- Large screen LED, white backlight more clear.
- Intelligent package chip.

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
1/60	15/13	42×31×32



YT-0311

Specifications

Body material	ABS Insulation	Spec	Φ3×142mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	43g

Ultra-fine probe



Stainless steel alligator clip



Flexible test line



- High quality insulating resin, good flame retardant.
- Measuring line elasticity super, length up to 3.5 meters.
- LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 8mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
10/120	10/8	42×32×43



YT-0311A

Specifications

Body material	ABS Insulation	Spec	Φ3×142mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	59g

Long life neon lamp



Stainless steel alligator clip



Flexible test line



- High quality insulating resin, good flame retardant.
- Measuring line elasticity super, length up to 3.5 meters.
- LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 8mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
10/120	9.5/7.5	42×32×43



Cannot be used
for AC tests



● Product color can be customized
according to customer needs

YT-0311B

Specifications

Body material	ABS insulation	Spec	Φ3x142mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	20g

Ultra-fine probe Stainless steel
alligator clip Long life neon lamp



- High quality insulating resin, good flame retardant.
- LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 8mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
10/120	7.5/5.5	42x32x45



Cannot be used
for AC tests




● Product color can be customized
according to customer needs

YT-0313

Specifications

Body material	ABS insulation	Spec	Φ3.5x142mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	42g

Ultra-fine probe Super bright
LED indicator Built-in buzzer



- High quality insulating resin, good flame retardant.
- Measuring line elasticity super, length up to 3 meters.
- Built-in super bright LED indicator light (red light, green light), test battery positive and negative electrode, the positive electrode will have "drip" sound, red light; The negative light is green.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 8 mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
10/120	8/6	42x32x45



Cannot be used
for AC tests




● Product color can be customized
according to customer needs

YT-0312 Super - bright motor test pen

Specifications

Body material	ABS insulation	Spec	Φ3.5x152mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	50g

Ultra-fine probe Super bright
LED indicator Line continuity
detection



- High quality insulating resin, good flame retardant.
- Measuring line elasticity super, length up to 3.5 meters.
- Super bright LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- The maximum opening of the flip crocodile clip is 12mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
10/120	10/8	42x32x45



Cannot be used
for AC tests




● Product color can be customized
according to customer needs

YT-0313A

Specifications

Body material	ABS insulation	Spec	Φ3.5x142mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	42g

Ultra-fine probe Super bright
LED indicator Built-in buzzer



- High quality insulating resin, good flame retardant.
- Measuring line elasticity super, length up to 3 meters.
- Built-in super bright LED indicator light (red light, green light), test battery positive and negative, will have a "beep" sound, positive red light; The negative light is green.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 8 mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
10/120	8/6	42x32x45



● Product color can be customized according to customer needs

YT-0321

Specifications

Body material	ABS Insulation	Spec	φ1.8x190mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	112g

Ultra-fine probe



Flip type pure copper alligator clip



Super bright LED indicator



- High quality insulating resin, good flame retardant.
- Red and green LED light display, distinguish positive and negative electrode.
- Double crocodile clip, thread tail crocodile clip maximum opening 12mm, needle crocodile clip easy to use.
- Economical and practical, high stability.
- Full PU spring wire, quick spring back after use.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
6/60	11.5/39.5	63x36x32



YT-0323

Pure copper automobile measuring pencil

Specifications

Body material	Pure copper	Spec	φ2x113mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	42g

The main body of pure copper



Stainless steel alligator clip




Flexible test line



- The main body of pure copper, good flame retardant.
- Measuring line elasticity super, length up to 3.5 meters.
- LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 8mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
12/240	16/14	52x43x36

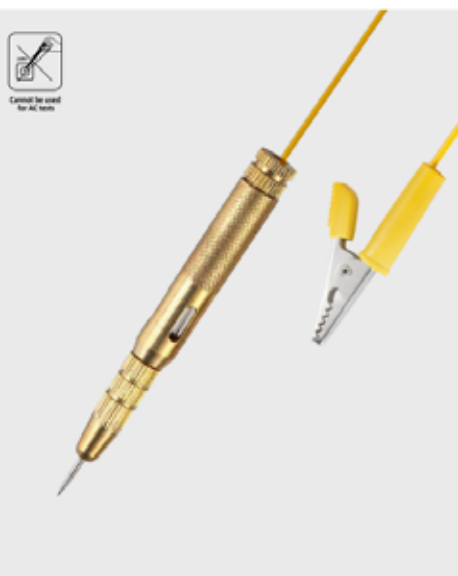

YT-0322

Pure copper automobile measuring pencil

Specifications

Body material	Pure copper	Spec	φ2x115mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	62g

The main body of pure copper



Stainless steel alligator clip




Flexible test line



- The main body of pure copper, good flame retardant.
- Measuring line elasticity super, length up to 3.5 meters.
- LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 8mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
12/240	18/16	52x43x36

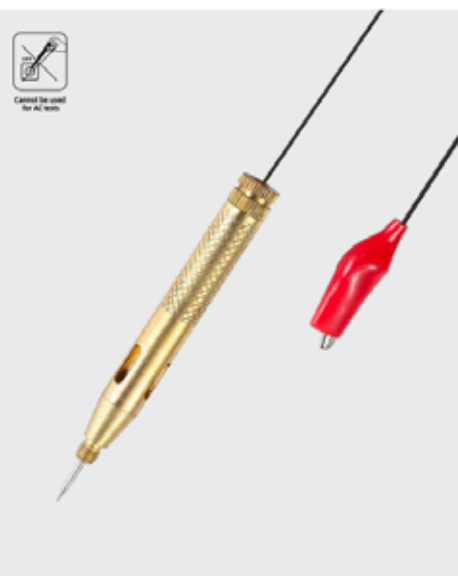

YT-0325

Pure copper automobile measuring pencil

Specifications

Body material	Pure copper	Spec	φ2x115mm
Test range	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	32g

The main body of pure copper



Stainless steel alligator clip



Stainless steel alligator clip



- The main body of pure copper, good flame retardant.
- LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 8mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
24/240	12/10	62x19x36



YT-0326

Specifications

Body material	ABS insulation	Spec	φ1.5x190mm
Test rang	DC 6-12-24V	Service life	30000 times
Batch material	72 steel	Product weight	108g

Ultra-fine probe



Stainless steel alligator clip



Super bright LED indicator



- High strength transparent body.
- High quality insulating resin, good flame retardant.
- Super bright LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 17mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
6/60	7.5/5.5	63x36x32



YT-0327

Specifications

Body material	ABS insulation	Spec	φ1.5x226mm
Test rang	DC 6-12-24V	Service life	30000 times
Batch material	72 steel	Product weight	145g

Long life neon lamp



High strength transparent body



Flip type pure copper alligator clip



- High quality insulating resin, good flame retardant.
- LED light display, easy to observe.
- Retractable nickel-chromium wire, super elastic, wire length about 5m.
- Induction contact after quenching treatment, high hardness.
- The maximum opening of the flip crocodile clip is 12mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
6/60	13/11	78.5x40x34



YT-0326A

Specifications

Body material	ABS insulation	Spec	φ1.5x190mm
Test rang	DC 6-12-24V	Service life	30000 times
Batch material	72 steel	Product weight	127g

Ultra-fine probe



Flip type pure copper alligator clip



Super bright LED indicator



- High strength transparent body.
- High quality insulating resin, good flame retardant.
- Full PU spring wire, quick spring back after use.
- Super bright LED light display, easy to observe.
- Induction contact after quenching treatment, high hardness.
- Crocodile clip maximum opening 17mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
6/60	10/9	42x32x45



YT-0328

Specifications

Body material	ABS insulation	Spec	φ1.8x173mm
Test rang	DC 6-12-24V	Service life	30000 times
Batch material	Stainless steel	Product weight	112g

Ultra-fine probe



High strength transparent body



Flip type pure copper alligator clip



- High quality insulating resin, good flame retardant.
- LED light display, easy to observe.
- Retractable nickel-chromium wire, super elastic, wire length about 5m.
- Induction contact after quenching treatment, high hardness.
- The maximum opening of the flip crocodile clip is 12mm.
- Ultra-fine probe, higher sensitivity.

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
6/60	13/11	78.5x40x34



YT-36S

Smart multimeter

Specifications

Spec	162x40.2x18.5mm
Maximum reading	3 1/2 digit (5000Counts)
Product weight	71g



Built-in NCV, can test zero fine line

Type-C charging port

- Built-in lighting.
- Equipped with test pen function.
- (Low, middle and third grade suitable for different places)
- Type-C charging, solve the trouble of replacing the battery.
- Digital and analog double screen display, easy to observe.
- AC/DC voltage, resistance, diode, on-off test.
- Capacitance test, AC voltage with frequency display.
- Room temperature display, full range overload protection.
- Low voltage reminder, more humanized.
- Data retention, can retain test data, easy to record.
- Automatic shutdown function (5 minutes), more energy saving.
- Backlight lighting function, the use of a richer environment.



Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
1/30	4.5/4	32x24x34



YT-0827



Built-in LED background light



The overall support, for more occasions to use

Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
3/30	9/7	82x23x29



YT-36B

Smart multimeter

Specifications

Spec	162x40.2x18.5mm
Maximum reading	3 1/2 digit (5000Counts)
Product weight	71g



Built-in NCV, can test zero fine line

Type-C charging port

- Built-in lighting.
- Equipped with test pen function.
- (Low, middle and third grade suitable for different places)
- Type-C charging, solve the trouble of replacing the battery.
- Digital and analog double screen display, easy to observe.
- AC/DC voltage test, resistance test, on-off test.
- AC voltage has its own frequency display.
- Room temperature display, full range overload protection.
- Low voltage reminder, more humanized.
- Data retention, can retain test data, easy to record.
- Automatic shutdown function (5 minutes), more energy saving.
- Backlight lighting function, the use of a richer environment.



Packing information

Qty/Ctn(pcs)	Weight(kg)	Size (cm)
1/30	4.5/4	32x24x34

Specifications

CODE	YT-0827B	YT-0827C	YT-0827D
DC voltage	200m/2000m/500V	200m/2000m/500V	200m/2000m/500V
AC voltage	200/500V	200/500V	200/500V
DC current	200u/2000u/ 20m/200m/10A	200u/2000u/ 20m/200m/10A	200u/2000u/ 20m/200m/10A
Resistance	200/2000/20k/2000kΩ	200/2000/20k/2000kΩ	200/2000/20k/2000kΩ
On-off test	√	√	√
Temperature	/	-20-300°C	-20-300°C
Buzzer	√	√	√
Diode test	√	√	√
Audion test	√	√	√
Precise resistance	/	/	√
Dimensions	140x88x30mm	140x88x30mm	140x88x30mm
weight	188g	188g	188g