



REFINED SPECIAL GRANDE IMPACT TOOL



IMPACT SCREWDRIVER HEAD

Taiwan imported S2 upgraded version of tool steel is processed by special heat treatment and has ultra-high torque output.

Use with an electric impact screwdriver to ensure maximum impact resistance.



The head is precision CNC machined, with better plumpness and more accurate appearance. In high-strength tightening operations, reduce head wear.

The special torsion buffer design absorbs deformation, increases the torque transmission, and prolongs the service life.

Laser marking enhances the recognition of size specifications.

The surface is treated with manganese phosphate to enhance rust and corrosion resistance

Slotted Impact Screwdriver Head



Numbering	Specification	(mm) Length
JSY-SL5025	SL5	25
JSY-SL6025	SL6	25
JSY-SL7025	SL7	25
JSY-SL8025	SL8	25

Hexagonal impact screwdriver bit



Numbering	Specification	(mm) Length
JSY-H3025	H3	25
JSY-H4025	H4	25
JSY-H5025	H5	25
JSY-H6025	H6	25
JSY-H7025	H7	25
JSY-H8025	H8	25

Torx impact screwdriver bit



Numbering	Specification	(mm) Length
JSY-T3025	T3	25
JSY-T4025	T4	25
JSY-T5025	T5	25
JSY-T6025	T6	25
JSY-T7025	T7	25
JSY-T8025	T8	25

Pozi impact screwdriver bit



Numbering	Specification	(mm) Length
JSY-PZ1025	PZ1	25
JSY-PZ2025	PZ2	25
JSY-PZ3025	PZ3	25

Phillips impact screwdriver bit



Numbering	Specification	(mm) Length
JSY-PH1025	PH1	25
JSY-PH2025	PH2	25
JSY-PH3025	PH3	25

Square impact screwdriver bit



Numbering	Specification	(mm) Length
JSY-SQ1025	SQ1	25
JSY-SQ2025	SQ2	25
JSY-SQ3025	SQ3	25

Product packaging method



Torx impact screwdriver bit



编号 Numbering	规格 Specification	长度(mm) Length
JSY-T3050	T3	50
JSY-T4050	T4	50
JSY-T5050	T5	50
JSY-T6050	T6	50
JSY-T7050	T7	50
JSY-T8050	T8	50

Phillips impact screwdriver bit



编号 Numbering	规格 Specification	长度(mm) Length
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Phillips impact screwdriver bit



Numbering	Specification	(mm) Length
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150


一字冲击螺丝批头

Slotted impact screwdriver head



编号 Numbering	规格 Specification	长度(mm) Length
JSY-SL4025	SL4	50
JSY-SL5025	SL5	50
JSY-SL6025	SL6	50

Impact double-end batch nozzle series

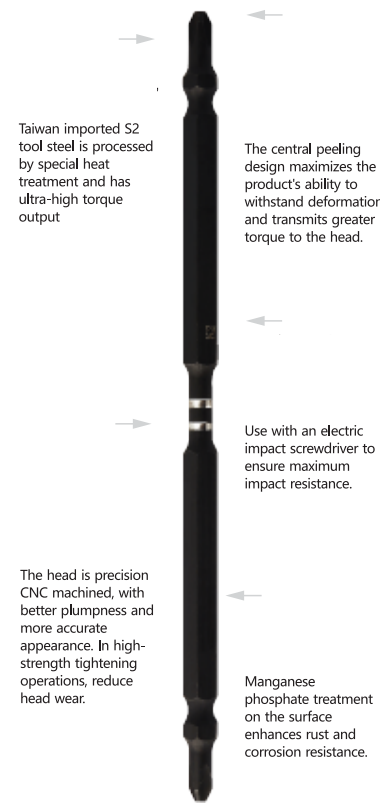

Taiwan imported S2 tool steel is processed by special heat treatment and has ultra-high torque output

The central peeling design maximizes the product's ability to withstand deformation and transmits greater torque to the head.

Use with an electric impact screwdriver to ensure maximum impact resistance.

The head is precision CNC machined, with better plumpness and more accurate appearance. In high-strength tightening operations, reduce head wear.

Manganese phosphate treatment on the surface enhances rust and corrosion resistance.

Phillips impact screwdriver bit



Numbering	Specification	(mm) Length
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Product packaging method



SINGLE HEAD SCREWDRIVER HEAD



Professional-grade fastening tools, high-strength power tool accessories

Hand tools and woodworking tools

Widely used in various fields



Single head screwdriver head

Taiwan imported S2 tool steel is processed by special heat treatment with high torque output.

Use with manual and electric screwdrivers.

The CNC machined head has good plumpness and more accurate shape. In the high-strength tightening operation, the head wear is reduced.

The surface is sandblasted.

Products are widely used in assembly lines, equipment maintenance, construction, home improvement and many other fields.

Slotted screwdriver head



Numbering	Specification	(mm) Length
JSY-SL4025	SL4	25
JSY-SL5025	SL5	25
JSY-SL6025	SL6	25
JSY-SL7025	SL7	25
JSY-SL8025	SL8	25
JSY-SL4050	SL4	50
JSY-SL5050	SL5	50
JSY-SL6050	SL6	50
JSY-SL7050	SL7	50
JSY-SL8050	SL8	50
JSY-SL4065	SL4	65
JSY-SL5065	SL5	65
JSY-SL6065	SL6	65
JSY-SL7065	SL7	65
JSY-SL8065	SL8	65
JSY-SL4075	SL4	75
JSY-SL5075	SL5	75
JSY-SL6075	SL6	75
JSY-SL7075	SL7	75
JSY-SL8075	SL8	75
JSY-SL40100	SL4	100
JSY-SL50100	SL5	100
JSY-SL60100	SL6	100
JSY-SL70100	SL7	100
JSY-SL80100	SL8	100
JSY-SL40150	SL4	150
JSY-SL50150	SL5	150
JSY-SL60150	SL6	150
JSY-SL70150	SL7	150
JSY-SL80150	SL8	150

Hexagon screw bit



Numbering	Specification	(mm) Length
JSY-H3025	H3	25
JSY-H4025	H4	25
JSY-H5025	H5	25
JSY-H6025	H6	25
JSY-H7025	H7	25
JSY-H8025	H8	25
JSY-H3050	H3	50
JSY-H4050	H4	50
JSY-H5050	H5	50
JSY-H6050	H6	50
JSY-H7050	H7	50
JSY-H8050	H8	50
JSY-H3065	H3	65
JSY-H4065	H4	65
JSY-H5065	H5	65
JSY-H6065	H6	65
JSY-H7065	H7	65
JSY-H8065	H8	65
JSY-H3075	H3	75
JSY-H4075	H4	75
JSY-H5075	H5	75
JSY-H6075	H6	75
JSY-H7075	H7	75
JSY-H8075	H8	75
JSY-H30100	H3	100
JSY-H40100	H4	100
JSY-H50100	H5	100
JSY-H60100	H6	100
JSY-H70100	H7	100
JSY-H80100	H8	100
JSY-H30150	H3	150
JSY-H40150	H4	150
JSY-H50150	H5	150
JSY-H60150	H6	150
JSY-H70150	H7	150
JSY-H80150	H8	150

Pozidriv screwdriver bit



Numbering	Specification	(mm) Length
JSY-PZ1025	PZ1	25
JSY-PZ2025	PZ2	25
JSY-PZ3025	PZ3	25
JSY-PZ1050	PZ1	50
JSY-PZ2050	PZ2	50
JSY-PZ3050	PZ3	50
JSY-PZ1065	PZ1	65
JSY-PZ2065	PZ2	65
JSY-PZ3065	PZ3	65
JSY-PZ1075	PZ1	75
JSY-PZ2075	PZ2	75
JSY-PZ3075	PZ3	75
JSY-PZ10100	PZ1	100
JSY-PZ20100	PZ2	100
JSY-PZ30100	PZ3	100
JSY-PZ10150	PZ1	150
JSY-PZ20150	PZ2	150
JSY-PZ30150	PZ3	150

Positioning batch Tsui



Numbering	Specification	(mm) Length
JSY-PH2025	PH2	25
JSY-PH2050	PH2	50

Phillips screwdriver head



Numbering	Specification	(mm) Length
JSY-PH1MNS25	PH1	25
JSY-PH2MNS25	PH2	25
JSY-PH3MNS25	PH3	25
JSY-PH1MNS50	PH1	50
JSY-PH2MNS50	PH2	50
JSY-PH3MNS50	PH3	50
JSY-PH1MNS65	PH1	65
JSY-PH2MNS65	PH2	65
JSY-PH3MNS65	PH3	65
JSY-PH1MNS75	PH1	75
JSY-PH2MNS75	PH2	75
JSY-PH3MNS75	PH3	75
JSY-PH1MNS100	PH1	100
JSY-PH2MNS100	PH2	100
JSY-PH3MNS100	PH3	100
JSY-PH1MNS150	PH1	150
JSY-PH2MNS150	PH2	150
JSY-PH3MNS150	PH3	150

Torx screwdriver bit



Numbering	Specification	(mm) Length
JSY-T10025	T10	25
JSY-T15025	T15	25
JSY-T20025	T20	25
JSY-T25025	T25	25
JSY-T30025	T30	25
JSY-T40025	T40	25
JSY-T50025	T50	25
JSY-T10050	T10	50
JSY-T15050	T15	50
JSY-T20050	T20	50
JSY-T25050	T25	50
JSY-T30050	T30	50
JSY-T40050	T40	50
JSY-T50050	T50	50
JSY-T10065	T10	65
JSY-T15065	T15	65
JSY-T20065	T20	65
JSY-T25065	T25	65
JSY-T30065	T30	65
JSY-T40065	T40	65
JSY-T50065	T50	65
JSY-T10075	T10	75
JSY-T15075	T15	75
JSY-T20075	T20	75
JSY-T25075	T25	75
JSY-T30075	T30	75
JSY-T40075	T40	75
JSY-T50075	T50	75
JSY-T100100	T10	100
JSY-T150100	T15	100
JSY-T200100	T20	100
JSY-T250100	T25	100
JSY-T300100	T30	100
JSY-T400100	T40	100
JSY-T500100	T50	100
JSY-T100150	T10	150
JSY-T150150	T15	150
JSY-T200150	T20	150
JSY-T250150	T25	150
JSY-T300150	T30	150
JSY-T400150	T40	150
JSY-T500150	T50	150

Phillips screwdriver head



Numbering	Specification	(mm) Length
JSY-PH1MNS25	PH1	25
JSY-PH2MNS25	PH2	25
JSY-PH3MNS25	PH3	25
JSY-PH1MNS50	PH1	50
JSY-PH2MNS50	PH2	50
JSY-PH3MNS50	PH3	50
JSY-PH1MNS65	PH1	65
JSY-PH2MNS65	PH2	65
JSY-PH3MNS65	PH3	65
JSY-PH1MNS75	PH1	75
JSY-PH2MNS75	PH2	75
JSY-PH3MNS75	PH3	75
JSY-PH1MNS100	PH1	100
JSY-PH2MNS100	PH2	100
JSY-PH3MNS100	PH3	100
JSY-PH1MNS150	PH1	150
JSY-PH2MNS150	PH2	150
JSY-PH3MNS150	PH3	150

Slotted screwdriver head



Numbering	Specification	(mm) Length
JSY-SL4025	SL4	25
JSY-SL5025	SL5	25
JSY-SL6025	SL6	25
JSY-SL7025	SL7	25
JSY-SL8025	SL8	25
JSY-SL10025	SL10	25
JSY-SL4050	SL4	50
JSY-SL5050	SL5	50
JSY-SL6050	SL6	50
JSY-SL7050	SL7	50
JSY-SL8050	SL8	50
JSY-SL10050	SL10	50
JSY-SL4065	SL4	65
JSY-SL5065	SL5	65
JSY-SL6065	SL6	65
JSY-SL7065	SL7	65
JSY-SL8065	SL8	65
JSY-SL10065	SL10	65
JSY-SL4075	SL4	75
JSY-SL5075	SL5	75
JSY-SL6075	SL6	75
JSY-SL7075	SL7	75
JSY-SL8075	SL8	75
JSY-SL10075	SL10	75
JSY-SL40100	SL4	100
JSY-SL50100	SL5	100
JSY-SL60100	SL6	100
JSY-SL70100	SL7	100
JSY-SL80100	SL8	100
JSY-SL100100	SL10	100
JSY-SL40150	SL4	150
JSY-SL50150	SL5	150
JSY-SL60150	SL6	150
JSY-SL70150	SL7	150
JSY-SL80150	SL8	150
JSY-SL100150	SL10	150

Product packaging method



NON-SLIP SCREWDRIVER HEAD

S2 tool steel imported from Taiwan is processed by special heat treatment. High torque output.

Use with manual and electric screwdrivers.



The head is CNC machined with good plumpness and more precise shape. In the high-strength tightening operation, the wear of the head is reduced.

The surface is sandblasted.

Products are widely used in assembly lines, equipment maintenance, construction, home improvement and many other fields.

Phillips non-slip screwdriver head



编号 Numbering	规格 Specification	长度(mm) Length
JSY-PH1025	PH1	25
JSY-PH2025	PH2	25
JSY-PH3025	PH3	25
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH1075	PH1	75
JSY-PH2075	PH2	75
JSY-PH3075	PH3	75
JSY-PH1090	PH1	90
JSY-PH2090	PH2	90
JSY-PH3090	PH3	90
JSY-PH10127	PH1	127
JSY-PH20127	PH2	127
JSY-PH30127	PH3	127
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Phillips non-slip screwdriver head



编号 Numbering	规格 Specification	长度(mm) Length
JSY-PH1025	PH1	25
JSY-PH2025	PH2	25
JSY-PH3025	PH3	25
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH1075	PH1	75
JSY-PH2075	PH2	75
JSY-PH3075	PH3	75
JSY-PH1090	PH1	90
JSY-PH2090	PH2	90
JSY-PH3090	PH3	90
JSY-PH10127	PH1	127
JSY-PH20127	PH2	127
JSY-PH30127	PH3	127
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Pozidriv anti-slip screwdriver head



Numbering	Specification	(mm) Length
JSY-PZ1025	PZ1	25
JSY-PZ2025	PZ2	25
JSY-PZ3025	PZ3	25
JSY-PZ1050	PZ1	50
JSY-PZ2050	PZ2	50
JSY-PZ3050	PZ3	50
JSY-PZ1065	PZ1	65
JSY-PZ2065	PZ2	65
JSY-PZ3065	PZ3	65
JSY-PZ1075	PZ1	75
JSY-PZ2075	PZ2	75
JSY-PZ3075	PZ3	75
JSY-PZ1090	PZ1	90
JSY-PZ2090	PZ2	90
JSY-PZ3090	PZ3	90
JSY-PZ10127	PZ1	127
JSY-PZ20127	PZ2	127
JSY-PZ30127	PZ3	127
JSY-PZ10150	PZ1	150
JSY-PZ20150	PZ2	150
JSY-PZ30150	PZ3	150

Product packaging method





MAGNETIC SCREWDRIVER HEAD

Professional-grade fastening tools, high-strength power tool accessories

Hand tools and woodworking tools

Widely used in various fields

MAGNETIC SCREWDRIVER HEAD

The head is CNC machined with good plumpness and more precise shape. In the high-strength tightening operation, the wear of the head is reduced.


The surface is sandblasted.

Products are widely used in assembly lines, equipment maintenance, construction, home improvement and many other fields.

S2 tool steel imported from Taiwan is processed by special heat treatment. High torque output.

Use with manual and electric screwdrivers.

DOUBLE-SECTION SCREWDRIVER HEAD

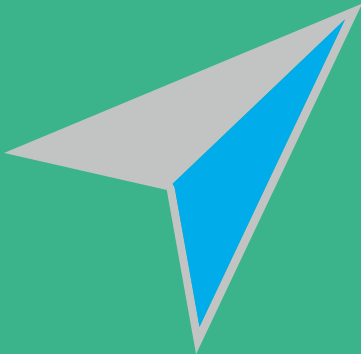

Professional-grade fastening tools, high-strength power tool accessories

Hand tools and woodworking tools

Widely used in various fields

Screwdriver bit with metal thread magnetic coil



Numbering	Specification	(mm) Length
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Screwdriver bit with metal thread magnetic coil



Numbering	Specification	(mm) Length
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Screwdriver bit for metal magnetic coil



Numbering	Specification	(mm) Length
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Plastic magnetic screwdriver head



Numbering	Specification	(mm) Length
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Plastic magnetic screwdriver head



Numbering	Specification	(mm) Length
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150

Screwdriver bit for metal magnetic coil



Numbering	Specification	(mm) Length
JSY-PH1025	PH1	65
JSY-PH2025	PH2	65
JSY-PH3025	PH3	65

Product packaging method



DOUBLE-SECTION SCREWDRIVER HEAD

S2 tool steel imported from Taiwan is processed by special heat treatment. High torque output.

Use with manual and electric screwdrivers.

The head is CNC machined with good plumpness and more precise shape. In the high-strength tightening operation, the wear of the head is reduced.

The surface is sandblasted.

Products are widely used in assembly lines, equipment maintenance, construction, home improvement and many other fields.

Double-section screwdriver head (ordinary body)



numbering	specifications	Lenght (mm)
JSY-PZ*65	PZ1/2/3	65
JSY-PH*65	PH1/2/3	65
JSY-T*65	T10/15/30	65
JSY-PZ*65	PZ1/2/3	110
JSY-PH*65	PH1/2/3	110
JSY-T*65	T10/15/30	110
JSY-PZ*65	PZ1/2/3	150
JSY-PH*65	PH1/2/3	150
JSY-T*65	T10/15/30	150

Double-section screwdriver head



numbering	specifications	Lenght (mm)
JSY-PZ*65	PZ1/2/3	65
JSY-PH*65	PH1/2/3	65
JSY-T*65	T10/15/30	65
JSY-PZ*65	PZ1/2/3	110
JSY-PH*65	PH1/2/3	110
JSY-T*65	T10/15/30	110
JSY-PZ*65	PZ1/2/3	150
JSY-PH*65	PH1/2/3	150
JSY-T*65	T10/15/30	150

Double-section screwdriver head (Flower head common body)




numbering	specifications	Lenght (mm)
JSY-PZ*65	PZ1/2/3	65
JSY-PH*65	PH1/2/3	65
JSY-T*65	T10/15/30	65
JSY-PZ*65	PZ1/2/3	110
JSY-PH*65	PH1/2/3	110
JSY-T*65	T10/15/30	110
JSY-PZ*65	PZ1/2/3	150
JSY-PH*65	PH1/2/3	150
JSY-T*65	T10/15/30	150

Double-section screwdriver head (Striped flat groove)



numbering	specifications	Lenght (mm)
JSY-PZ*65	PZ1/2/3	65
JSY-PH*65	PH1/2/3	65
JSY-T*65	T10/15/30	65
JSY-PZ*65	PZ1/2/3	110
JSY-PH*65	PH1/2/3	110
JSY-T*65	T10/15/30	110
JSY-PZ*65	PZ1/2/3	150
JSY-PH*65	PH1/2/3	150
JSY-T*65	T10/15/30	150

Product packaging method

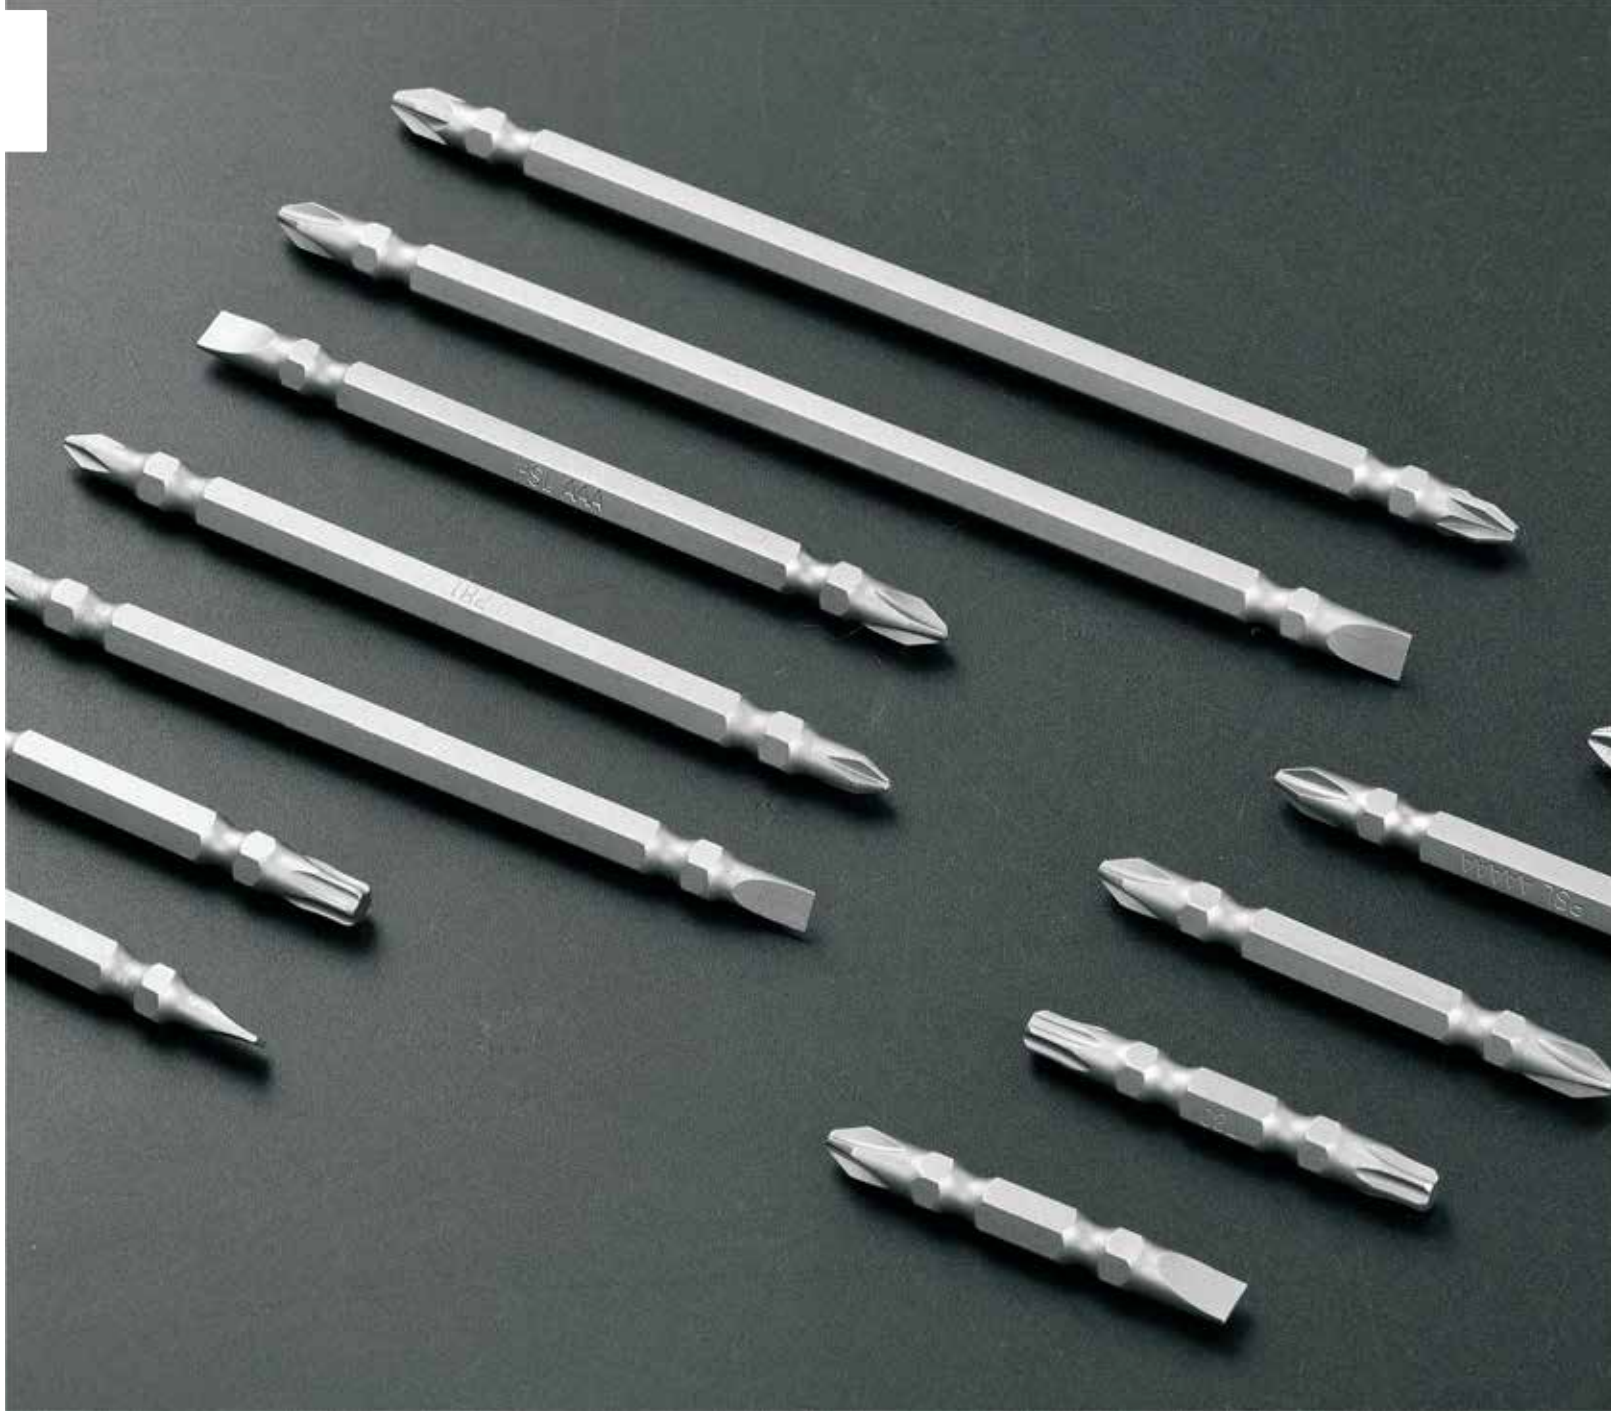

DOUBLE-HEAD SCREWDRIVER BIT

Professional-grade fastening tools, high-strength power tool accessories

Hand tools and woodworking tools

Widely used in various fields

Double-head screwdriver bit

Schematic diagram of groove size:



Using S2 tool steel imported from Taiwan, hardness 58-62HRC, greater torque and longer life.

The double heads have strong magnetism and are easy to use.



The shape of the head is precision CNC machined, fuller and better. In high-strength tightening operations, it reduces the risk of screw damage while reducing head wear.

Suitable for pneumatic screwdrivers or electric screwdrivers, and can be widely used in assembly lines, equipment maintenance, construction, home improvement and other fields.

Phillips screwdriver head



Numbering	Specification	(mm) Length
JSY-PH1025	PH1	25
JSY-PH2025	PH2	25
JSY-PH3025	PH3	25
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH1075	PH1	75
JSY-PH2075	PH2	75
JSY-PH3075	PH3	75
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10110	PH1	110
JSY-PH20110	PH2	110
JSY-PH30110	PH3	110
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150
JSY-PH10200	PH1	200
JSY-PH20200	PH2	200
JSY-PH30200	PH3	200
JSY-PH10250	PH1	250
JSY-PH20250	PH2	250
JSY-PH30250	PH3	250
JSY-PH10300	PH1	300
JSY-PH20300	PH2	300
JSY-PH30300	PH3	300

Pozidriv screwdriver bit



Numbering	Specification	(mm) Length
JSY-PZ10	PZ1	25
JSY-PZ20	PZ2	25
JSY-PZ30	PZ3	25
JSY-PZ10	PZ1	50
JSY-PZ20	PZ2	50
JSY-PZ30	PZ3	50
JSY-PZ10	PZ1	65
JSY-PZ20	PZ2	65
JSY-PZ30	PZ3	65
JSY-PZ10	PZ1	75
JSY-PZ20	PZ2	75
JSY-PZ30	PZ3	75
JSY-PZ10	PZ1	100
JSY-PZ20	PZ2	100
JSY-PZ30	PZ3	100
JSY-PZ10	PZ1	110
JSY-PZ20	PZ2	110
JSY-PZ30	PZ3	110
JSY-PZ10	PZ1	150
JSY-PZ20	PZ2	150
JSY-PZ30	PZ3	150
JSY-PZ10	PZ1	200
JSY-PZ20	PZ2	200
JSY-PZ30	PZ3	200
JSY-PZ10	PZ1	250
JSY-PZ20	PZ2	250
JSY-PZ30	PZ3	250
JSY-PZ10	PZ1	300
JSY-PZ20	PZ2	300
JSY-PZ30	PZ3	300

Slotted screwdriver head



Numbering	Specification	(mm) Length
JSY-SL3025	SL3	25
JSY-SL4025	SL4	25
JSY-SL5025	SL5	25
JSY-SL6025	SL6	25
JSY-SL7025	SL7	25
JSY-SL8025	SL8	25
JSY-SL3050	SL3	50
JSY-SL4050	SL4	50
JSY-SL5050	SL5	50
JSY-SL6050	SL6	50
JSY-SL7050	SL7	50
JSY-SL8050	SL8	50
JSY-SL3065	SL3	65
JSY-SL4065	SL4	65
JSY-SL5065	SL5	65
JSY-SL6065	SL6	65
JSY-SL7065	SL7	65
JSY-SL8065	SL8	65
JSY-SL3075	SL3	75
JSY-SL4075	SL4	75
JSY-SL5075	SL5	75
JSY-SL6075	SL6	75
JSY-SL7075	SL7	75
JSY-SL8075	SL8	75
JSY-SL30100	SL3	100
JSY-SL40100	SL4	100
JSY-SL50100	SL5	100
JSY-SL60100	SL6	100
JSY-SL70100	SL7	100
JSY-SL80100	SL8	100
JSY-SL30150	SL3	150
JSY-SL40150	SL4	150
JSY-SL50150	SL5	150
JSY-SL60150	SL6	150
JSY-SL70150	SL7	150
JSY-SL80150	SL8	150

Torx screwdriver bit



编号 Numbering	规格 Specification	长度(mm) Length
JSY-T10025	T10	25
JSY-T15025	T15	25
JSY-T20025	T20	25
JSY-T25025	T25	25
JSY-T30025	T30	25
JSY-T40025	T40	25
JSY-T50025	T50	25
JSY-T10050	T10	50
JSY-T15050	T15	50
JSY-T20050	T20	50
JSY-T25050	T25	50
JSY-T30050	T30	50
JSY-T40050	T40	50
JSY-T50050	T50	50
JSY-T10065	T10	65
JSY-T15065	T15	65
JSY-T20065	T20	65
JSY-T25065	T25	65
JSY-T30065	T30	65
JSY-T40065	T40	65
JSY-T50065	T50	65
JSY-T10075	T10	75
JSY-T15075	T15	75
JSY-T20075	T20	75
JSY-T25075	T25	75
JSY-T30075	T30	75
JSY-T40075	T40	75
JSY-T50075	T50	75
JSY-T100100	T10	100
JSY-T150100	T15	100
JSY-T200100	T20	100
JSY-T250100	T25	100
JSY-T300100	T30	100
JSY-T400100	T40	100
JSY-T500100	T50	100
JSY-T100150	T10	150
JSY-T150150	T15	150
JSY-T200150	T20	150
JSY-T250150	T25	150
JSY-T300150	T30	150
JSY-T400150	T40	150
JSY-T500150	T50	150

Double-head screwdriver bit



numbering	specifications	Lenght (mm)
JSY-PSL26025	2x6	25
JSY-PSL26050	2x6	50
JSY-PSL26065	2x6	65
JSY-PSL26075	2x6	75
JSY-PSL260100	2x6	100
JSY-PSL260150	2x6	150

Square screwdriver head



编号 Numbering	规格 Specification	长度(mm) Length
JSY-SQ2MNS50	SQ3	50
JSY-SQ3MNS50	SQ4	50
JSY-SQ4MNS50	SQ5	50
JSY-SQ5MNS50	SQ6	50
JSY-SQ6MNS50	SQ2	50
JSY-SQ2MNS65	SQ3	65
JSY-SQ3MNS65	SQ4	65
JSY-SQ4MNS65	SQ5	65
JSY-SQ5MNS65	SQ6	65
JSY-SQ6MNS65	SQ2	65
JSY-SQ2MNS75	SQ3	75
JSY-SQ3MNS75	SQ4	75
JSY-SQ4MNS75	SQ5	75
JSY-SQ5MNS75	SQ6	75
JSY-SQ6MNS75	SQ2	75
JSY-SQ2MNS100	SQ3	100
JSY-SQ3MNS100	SQ4	100
JSY-SQ4MNS100	SQ5	100
JSY-SQ5MNS100	SQ6	100
JSY-SQ6MNS100	SQ2	100
JSY-SQ2MNS150	SQ3	150
JSY-SQ3MNS150	SQ4	150
JSY-SQ4MNS150	SQ5	150
JSY-SQ5MNS150	SQ6	150
JSY-SQ6MNS150		150

Phillips screwdriver head



Numbering	Specification	(mm) Length
JSY-PH1025	PH1	25
JSY-PH2025	PH2	25
JSY-PH3025	PH3	25
JSY-PH1050	PH1	50
JSY-PH2050	PH2	50
JSY-PH3050	PH3	50
JSY-PH1065	PH1	65
JSY-PH2065	PH2	65
JSY-PH3065	PH3	65
JSY-PH1075	PH1	75
JSY-PH2075	PH2	75
JSY-PH3075	PH3	75
JSY-PH10100	PH1	100
JSY-PH20100	PH2	100
JSY-PH30100	PH3	100
JSY-PH10110	PH1	110
JSY-PH20110	PH2	110
JSY-PH30110	PH3	110
JSY-PH10150	PH1	150
JSY-PH20150	PH2	150
JSY-PH30150	PH3	150
JSY-PH10200	PH1	200
JSY-PH20200	PH2	200
JSY-PH30200	PH3	200
JSY-PH10250	PH1	250
JSY-PH20250	PH2	250
JSY-PH30250	PH3	250
JSY-PH10300	PH1	300
JSY-PH20300	PH2	300
JSY-PH30300	PH3	300

Product packaging method



GRIPPER/MAGNETIZER

Professional-grade fastening tools, high-strength power tool accessories

Hand tools and woodworking tools

Widely used in various fields



GRIPPER

Screw holder for screwdriver bar, long bit and L-wrench, with screw holding function

With holding function, all shapes and sizes of screws can be firmly clamped on the tool

Suitable for round and hexagonal toolholders with diameters of 4.5-6.0mm and 6.0-8.5mm



HOW THE GRIPPER WORKS




Slide the holder into the screwdriver shaft until the tip of the blade is exposed.




When the screw head is pushed to the surface, the bracket of the holder will be further separated, and when the screw is buried, the bracket will automatically withdraw.




Place the screw on the bit and clamp it with the holder.

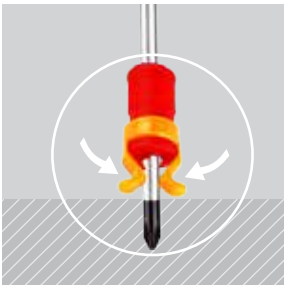

When tightening the screw in the blind hole, the screw clamp is pushed back so that it can touch the screw in a deeper position.

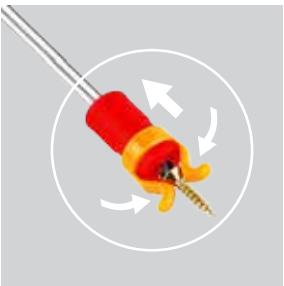

Pull the holder toward the handle until the two brackets are slightly separated and clamp the screw head. When the screw is fully tightened, pushing and pulling the holder will automatically release the screw.

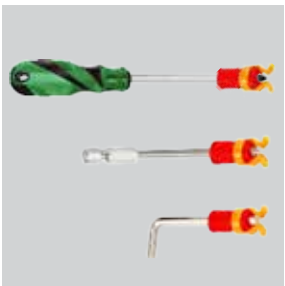


The holder can also be used for L-wrenches and long bits

MAGNETIZER

The unique magnet effect doubles the suction power of the bit

With the use of bits, even continuous work such as screw fastening in a narrow and limited space or gypsum board is easily competent

Suitable for bits and screwdrivers with a diameter of 6.35mm or less

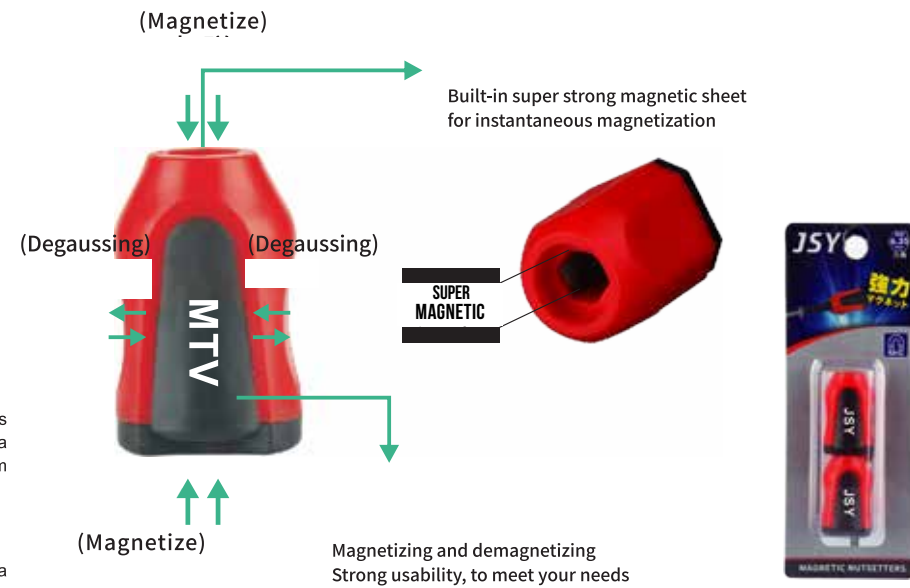

High quality material

The shell is made of high-quality plastic, which is strong and wear-resistant

Powerful Magnet

Built-in super strong magnetic sheet, strong magnetic force



Screwdriver with magnet




Hex wrench with magnetic




Bit magnetic

Various specifications


Choose different specifications of magnetic sleeves according to the needs of use

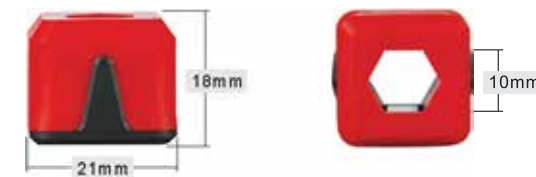

◆ 6-10mm: 适合6mm-10mm杆径

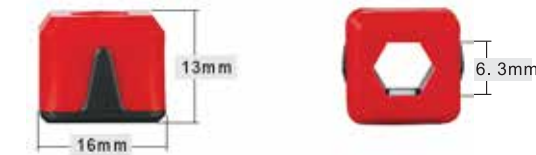

◆ 4-6.3mm: 适合4mm-6.3mm杆径

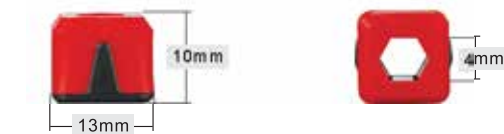

◆ 1.5-4mm: 适合1.5mm-4mm杆径

1/4" 孔径六角对边6.35mm
磁套可吸附在细杆径上不担心脱落
Aperture Hexagonal Opposite 6.35mm
The magnetic sleeve can be adsorbed on the thin rod diameter without worrying about falling off



MAGNETIC SLEEVE/POST

Special industrial grade products

Use with percussion drills and pistol drills to exert super impact resistance

Mostly used in industrial assembly lines, construction industry, home improvement, facility maintenance and other fields

Deepen the sleeve



Numbering	Specification	(mm) Length
JSY-80MNS5.5	5.5	80
JSY-80MNS6.0	6.0	80
JSY-80MNS7.0	7.0	80
JSY-80MNS8.0	8.0	80
JSY-80MNS9.0	9.0	80
JSY-80MNS10	10	80
JSY-80MNS11	11	80
JSY-80MNS12	12	80
JSY-80MNS13	13	80
JSY-80MNS14	14	80
JSY-80MNS15	15	80
JSY-80MNS16	16	80
JSY-80MNS17	17	80
JSY-80MNS18	18	80
JSY-80MNS19	19	80
JSY-100MNS5.5	5.5	100
JSY-100MNS6.0	6.0	100
JSY-100MNS7.0	7.0	100
JSY-100MNS8.0	8.0	100
JSY-100MNS9.0	9.0	100
JSY-100MNS10	10	100
JSY-100MNS11	11	100
JSY-100MNS12	12	100
JSY-100MNS13	13	100
JSY-100MNS14	14	100
JSY-100MNS15	15	100
JSY-100MNS16	16	100
JSY-100MNS17	17	100
JSY-100MNS18	18	100
JSY-100MNS19	19	100
JSY-150MNS5.5	5.5	150
JSY-150MNS6.0	6.0	150
JSY-150MNS7.0	7.0	150
JSY-150MNS8.0	8.0	150
JSY-150MNS9.0	9.0	150
JSY-150MNS10	10	150
JSY-150MNS11	11	150
JSY-150MNS12	12	150
JSY-150MNS13	13	150
JSY-150MNS14	14	150
JSY-150MNS15	15	150
JSY-150MNS16	16	150
JSY-150MNS17	17	150
JSY-150MNS18	18	150
JSY-150MNS19	19	150

Magnetic sleeve



Numbering	Specification	(mm) Length
JSY-42MNS6	6	42
JSY-42MNS7	7	42
JSY-42MNS8	8	42
JSY-42MNS9	9	42
JSY-42MNS10	10	42
JSY-42MNS11	11	42
JSY-42MNS12	12	42
JSY-42MNS13	13	42
JSY-45MNS6	6	45
JSY-45MNS7	7	45
JSY-45MNS8	8	45
JSY-45MNS9	9	45
JSY-45MNS10	10	45
JSY-45MNS11	11	45
JSY-45MNS12	12	45
JSY-45MNS13	13	45
JSY-48MNS6	6	48
JSY-48MNS7	7	48
JSY-48MNS8	8	48
JSY-48MNS9	9	48
JSY-48MNS10	10	48
JSY-48MNS11	11	48
JSY-48MNS12	12	48
JSY-48MNS13	13	48
JSY-65MNS14	14	65
JSY-65MNS15	15	65
JSY-65MNS16	16	65
JSY-65MNS17	17	65
JSY-65MNS18	18	65
JSY-65MNS19	19	65

Stripe quick release adaptor



Numbering	Specification	(mm) Length
JSY-60MNS41	1/4"	60
JSY-100MNS41	1/4"	100
JSY-150MNS41	1/4"	150

Magnetic sleeve



Numbering	Specification	(mm) Length
JSY-42MNS8	8	42
JSY-45MNS8	8	45
JSY-48MNS8	8	48
JSY-65MNS8	8	65
JSY-65MNS10	10	65

快脱接杆
Quick release extension



Numbering	Specification	(mm) Length
JSY-60MNS41	1/4"	60
JSY-100MNS41	1/4"	100
JSY-150MNS41	1/4"	150

Quick release extension



Numbering	Specification	(mm) Length
JSY-60MNS41	1/4"	60
JSY-100MNS41	1/4"	100
JSY-150MNS41	1/4"	150

Product packaging method



Willow beads



Numbering	Specification	(mm) Length
JSY-50MNS41	1/4"	50
JSY-50MNS83	3/8"	50
JSY-50MNS21	1/2"	50
JSY-65MNS41	1/4"	60
JSY-65MNS83	3/8"	60
JSY-73MNS21	1/2"	73

Willow beads



Numbering	Specification	(mm) Length
JSY-50MNS41	1/4"	50
JSY-50MNS83	3/8"	50
JSY-50MNS21	1/2"	50
JSY-65MNS41	1/4"	60
JSY-65MNS83	3/8"	60
JSY-73MNS21	1/2"	73

Magnetic extension



Numbering	Specification	(mm) Length
JSY-60MNS41	1/4"	60
JSY-75MNS41	1/4"	75
JSY-100MNS41	1/4"	100
JSY-150MNS41	1/4"	150
JSY-200MNS41	1/4"	200

Cross Impact Bit



Numbering	Specification	(mm) Length
JSY-PH1040	PH1	40
JSY-PH2040	PH2	40
JSY-PH3040	PH3	40
JSY-PH1080	PH1	80
JSY-PH2080	PH2	80
JSY-PH3080	PH3	80

One word hitting the bit



Numbering	Specification	(mm) Length
JSY-SL6040	SL6	40
JSY-SL8040	SL8	40
JSY-SL6080	SL6	80
JSY-SL8080	SL8	80

Universal magnetic coil

The batch head can be changed quickly when in use, which greatly improves the operating time. It is magnetic, which makes it convenient to draw the screws during operation. As long as the batch head is replaced, the use cost can be reduced.



Product packaging method



WALL HOLE OPENER

Diameter 30mm: 4 in charge (generally tap water pipes and water heater pipes)

Diameter 35mm: 6 in charge (generally tap water pipes and water heater pipes)

40mm diameter: 1 inch pipe

Diameter 55mm/65mm: 1P and 2P air conditioning ducts and toilet ducts

Diameter 75mm: 2P air conditioner cabinet-5P air conditioner cabinet pipe

Diameter 110mm-120mm: Dark hole on the wall of the wall switch, used for the inner box of the wall switch



Wall hole opener



Numbering	Specification	(mm) Length
JSY-25	25	70
JSY-30	30	70
JSY-35	35	70
JSY-40	40	70
JSY-45	45	70
JSY-50	50	70
JSY-55	55	70
JSY-60	60	70
JSY-65	65	70
JSY-68	68	70
JSY-70	70	70
JSY-75	75	70
JSY-80	80	70
JSY-85	85	70
JSY-90	90	70
JSY-95	95	70
JSY-100	100	70
JSY-105	105	70
JSY-110	110	70
JSY-115	115	70
JSY-120	120	70
JSY-125	125	70
JSY-130	130	70
JSY-150	150	70
JSY-160	160	70

Wall hole opener extension



Numbering	Specification	(mm) Length
JSY-110	110	26
JSY-160	160	26
JSY-200	200	26
JSY-250	250	26
JSY-300	300	26
JSY-330	330	26
JSY-350	350	26
JSY-400	400	26
JSY-450	450	26
JSY-500	500	26
JSY-600	600	26
JSY-800	800	26
JSY-1000	1000	26

Product packaging method





DRILL CHUCK ACCESSORIES

Special industrial grade products

Use with impact drills to exert super impact resistance

Mostly used in industrial assembly lines, construction industry, home improvement, facility maintenance and other fields



Drill Chuck Accessories

Suitable for use on pneumatic and electric screwdrivers. Excellent control and high precision.

Drill chuck



Size	Set (set)	Inner box (set)	Outer box (set)
1.5-10	3PC	6	60
1.5-13	3PC	6	60
1.5-16	3PC	5	50
1.5-10	2PC		60
1.5-13	2PC		50
1.5-16	2PC		50

Drill chuck extension



Size	Inner box (set)	Outer box (set)
SDS65*1/2	50	500
SDS65*3/8	50	500
SDS50*1/2	50	500
SDS50*3/8	50	500

Drill Chuck Key



Size	Inner box (set)	Outer box (set)
10	50	500
13	50	500
16	30	300



Product packaging method

